







- ADSL2/ADSL2+ high-speed Internet access
- Quality of Service (QoS) prioritizes time-sensitive traffics for better performance
- MAP Express provides a comprehensive and quick installation demo within 3 steps
- Firewall with Stateful Packet Inspection (SPI) and Denial of Service (DoS) prevention

Cost-effective Ultra High-Speed ADSL2+ Gateway for SOHO Networks

Benefits

Higher speed Internet access

ZyXEL P-660H Series is an all-in-one affordable router, compatible with high-speed ADSL, ADSL2 and ADSL2+ interfaces over existing copper lines. With speed up to 12 Mbps (ADSL2) or 24 Mbps (ADSL2+), the P-660H Series offers higher data transfer rates and better bandwidth than traditional ADSL gateways. Users can enjoy not only high-speed ADSL services, but also broadband multimedia applications such as interactive gaming, video streaming, and real-time audio much easier than before.

WFQ, SP support for Quality of Service (QoS) to provide sensitive service deploy for ISP

The P-660H Series enables network administrators to allocate network resources and to guarantee Quality of Service (QoS). The queue support WFQ, SP function prioritizes media services, and increases productivity and efficiency in daily operations by tailoring a system to specific demands such as VoIP, video streaming, video-conferencing or MP3 applications.

Robust firewall security

The ZyNOS operating system ensures state-of-art firewall performance and robust security from the P-660H Series. Based on Stateful Packet Inspection (SPI), DoS (Denial of Service) and DDoS features, it provides the first line defense against hackers, network intruders, and other harmful threats.

UPnP support

The P-660H Series supports UPnP discovery and UPnP NAT traversal. Using the standard TCP/IP protocol, the P-660H Series can join a network, obtain an IP address, convey its capabilities, and learn about other devices on the network.

P-660H Series
ADSL2+ 4-port Gateway











Specifications

System Specifications

ADSL Compliance

- ANSI T1.413 Issue 2
- ITU G.992.1 G.dmt
- ITU G.992.2 G.lite
- ITU G.994.1 G.hs
- ITU ADSL2 G.992.3, G.992.4
- ITU ADSI 2+ G.992.5
- Reach-Extended ADSL (RE ADSL)

ATM Support

- 8 PVCs support
- ATM forum UNI 3.1/4.0
- RFC 1483/2684 multiple protocol over AAL5
- RFC 2364 PPP over AAL5
- RFC 2516 PPP over Ethernet
- VC and LLC multiplexing
- ATM QoS UBR, CBR, VBR
- I.610 OAM F4/F5 loop-back, AIS, and RDI OAM cells

Firewall Security

- · Stateful Packet Inspection
- Prevent DoS, DDoS attack
- Policy-based access control
- Content filtering
- IP & generic packet filtering
- Real-time attack alert and logs

Routing Support

- IEEE 802.1d transparent bridging
- IP routing: TCP, UDP, ICMP, ARP
- RIPv1 and RIPv2
- IP multicast IGMP v1/v2
- IP policy route

IP Management

- SUA/Multi-NAT Internet sharing
- · Multimedia support
- VPN (IPSec, PPTP) pass-through
- DHCP server/relay/client
- DNS proxy
- Dynamic DNS
- UPnP support

Network Management

- Web-based configuration
- Remote management: Telnet, FTP, Web, ICMP
- FTP/TFTP for firmware upgrade and romfile backup and restore
- •TR069 support
- Built-in diagnostic tool

Advanced Features

- Triple play
- Quality of Service (QoS)
- Multimedia Auto Provisioner (MAP)

Hardware Specifications

- ADSL: One RJ-11 or RJ-45 port
- LAN: 4-port Switch, 10/100M auto MDI/MDIX
- Reset button
- Status LEDs indicator
- Power: 9 V DC 0.6 A

Physical Specifications

- Item weight: 280 g (0.62 lb)
- · Item dimensions: 180 (W) x 127 (D) x 37 (H) mm (7.08 (W) x 5 (D) x 1.46 (H) inches)
- Packing weight: 540 g (1.19 lb)
- · Packing dimensions: 280 (W) x 165 (D) x 51 (H) mm (11.02 (W) x 6.49 (D) x 2.01 (H) inches)

Environmental Specifications

Operating Environment

- Temperature: 0°C ~ 40°C
- Humidity: 20% ~ 85% (non-condensing)

Storage Environment

- Temperature: -20°C \sim 60°C
- Humidity: 20% ~ 90% (non-condensing)

Certification

- FCC
- CE

Product Description


• P-660H-T1 v3s

ADSL2+ 4-port Gateway over POTS


• P-660H-T3 v3s

ADSL2+ 4-port Gateway over ISDN

Rear Panel



Application Diagram

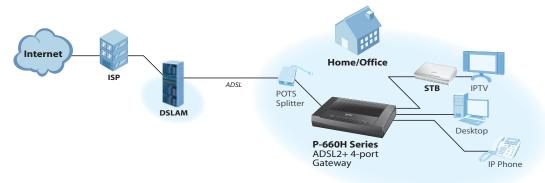

For more product information, visit us on the web at www.ZyXEL.com







