




1. นำ Aircard ใส่ซิม แล้วใส่ในช่อง USB ของ Router ให้เรียบร้อย แล้วค่อยเปิดเครื่อง Router
2. เชื่อมต่อ Router ด้วย LAN หรือ WIFI(กดปุ่ม WPS ค้างไว้ตอนคลิกเชื่อมต่อ)
3. เปิด เว็บ <http://192.168.123.254>




4. Login เข้าสู่ระบบควบคุม ด้วยรหัสผ่าน admin

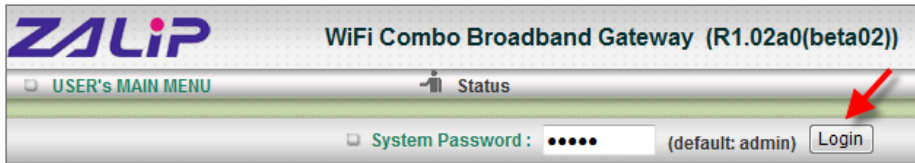

5. เลือก Advanced

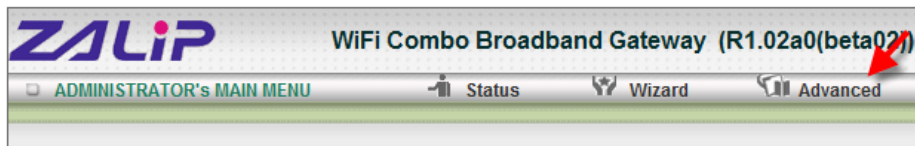

6. เลือก Network Setup

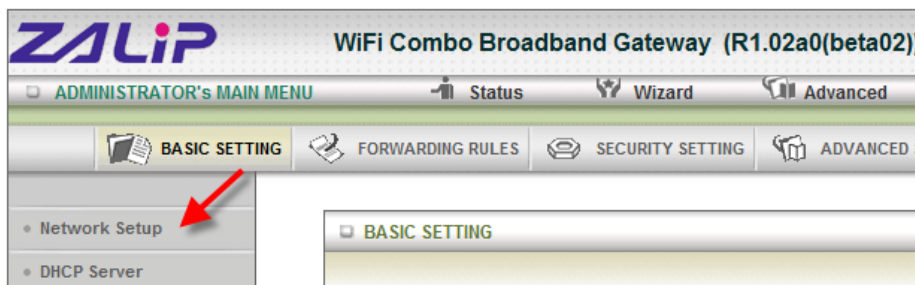

7. ตั้งค่าดังนี้
 - a. Wan Interface = Wireless WAN
 - b. WAN Type = 3G
 - c. Dial-Up Profile = Manual(สำหรับการเลือก Auto-Detection ใช้งานได้กับ Aircard หลายรุ่น แต่ไม่ทุกรุ่น)
 - d. Country = Thailand
 - e. ตั้งค่าของแต่ละเครือข่าย แล้วกด Save
 - i. AIS ตั้งค่า Telecom = AIS, 3G Network = WCDMA/HSPA, APN = internet, Dialed Number = *99**1#, MTU = 0
 - ii. DTAC ตั้งค่า Telecom = DTAC, 3G Network = WCDMA/HSPA, APN = www.dtac.co.th, Dialed Number = *99#, MTU = 0
 - iii. TRUE ตั้งค่า Telecom = TRUE, 3G Network = WCDMA/HSPA, APN = internet, Dialed Number = *99**1#, Account = true, Password = true, MTU = 0
 - iv. TOT ตั้งค่า Telecom = Others, 3G Network = WCDMA/HSPA, APN = internet, Dialed Number = *99**1#, MTU = 0

- v. CAT ตั้งค่า Telecom = Others, 3G Network = CDMA2000/EV-DO, Dialed Number = #777, Account = evdo@catevdo.com, Password = evdocat, MTU = 1024

WiFi Combo Broadband Gateway (R1.02a0(beta02))
English ▾

ADMINISTRATOR's MAIN MENU
Status
Wizard
Advanced
Logout

BASIC SETTING
FORWARDING RULES
SECURITY SETTING
ADVANCED SETTING
TOOLBOX

- Network Setup
- DHCP Server
- Wireless
- Change Password


LAN Setup

Item	Setting
▶ LAN IP Address	192.168.123.254
▶ Subnet Mask	255.255.255.0

Internet Setup [HELP]


▶ WAN Interface	Wireless WAN
▶ WAN Type	3G
▶ Dial-Up Profile	<input type="radio"/> Auto-Detection <input checked="" type="radio"/> Manual
▶ Country	Thailand
▶ Telecom	True
▶ 3G Network	WCDMAHSPA
▶ APN	internet (optional)
▶ PIN Code	(optional)
▶ Dialed Number	*99***1#
▶ Account	true (optional)
▶ Password (optional)
▶ Authentication	<input checked="" type="radio"/> Auto <input type="radio"/> PAP <input type="radio"/> CHAP
▶ Primary DNS	(optional)
▶ Secondary DNS	(optional)
▶ Connection Control	Auto Reconnect (always-on)
▶ Allowed Connection Time	<input checked="" type="radio"/> Always <input type="radio"/> By Schedule
▶ MTU	1500 (0 is auto)
▶ Keep Alive	<input checked="" type="radio"/> Disable <input type="radio"/> LCP Echo Request <ul style="list-style-type: none"> ▶ Interval <input type="text" value="10"/> seconds ▶ Max Failure Time <input type="text" value="3"/> times <input type="radio"/> Ping Remote Host <ul style="list-style-type: none"> ▶ Host IP <input type="text"/> ▶ Interval <input type="text" value="60"/> seconds

8. ตั้งค่าความปลอดภัยของ WiFi เลือก Wireless

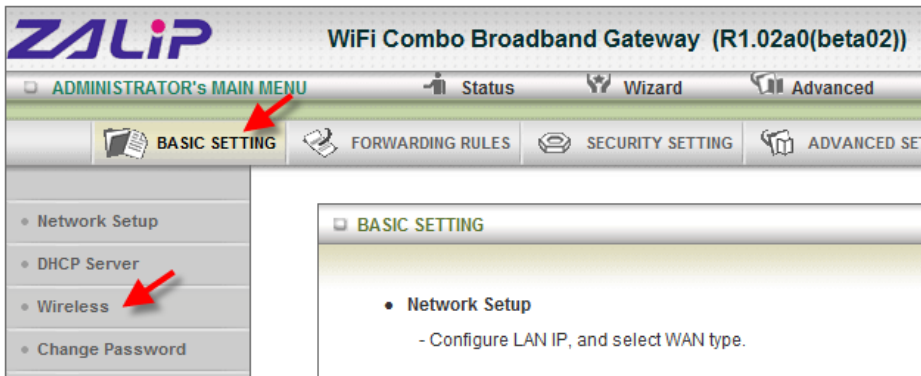

9. ตั้งค่า

- a. ชื่อ WiFi (Network ID)
- b. เลือกรูปแบบความปลอดภัย แนะนำเป็น WPA2-PSK
- c. ใส่รหัสผ่าน (Preshare Key) ตัวเลขหรือตัวอักษร 10 ตัว

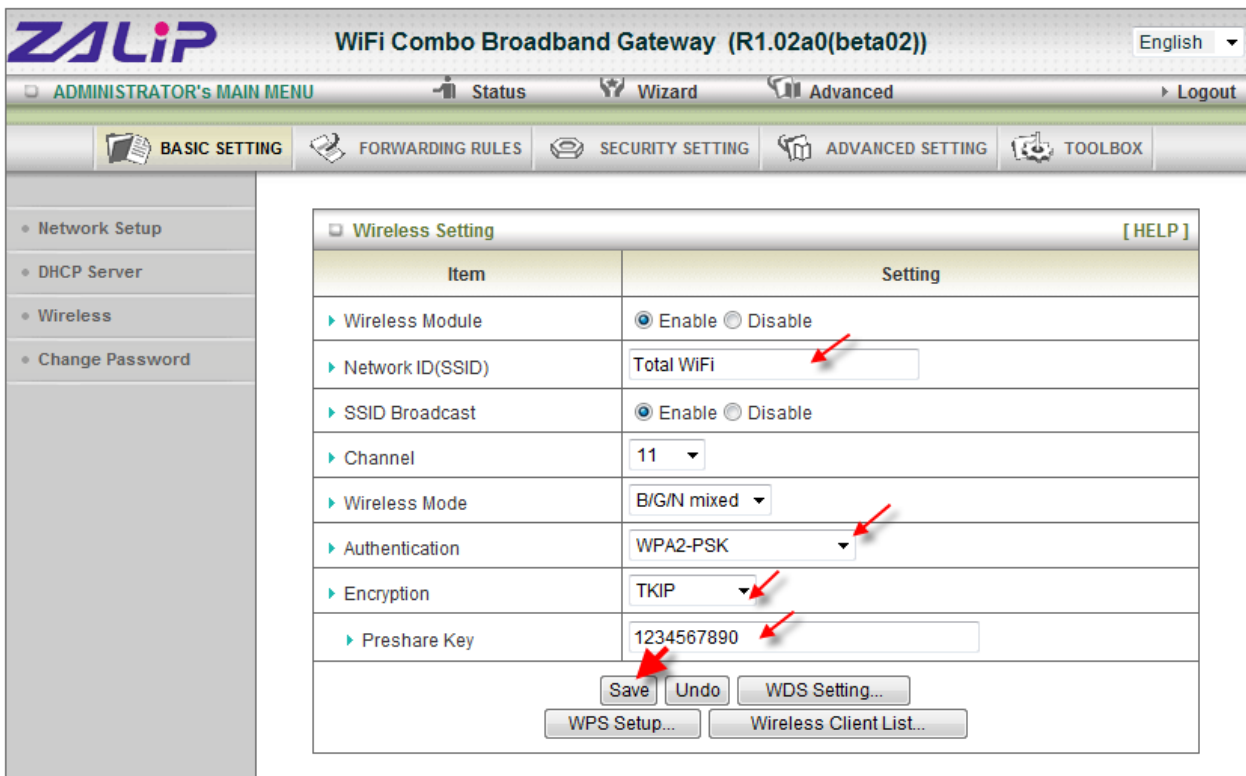


10. เมื่อตั้งค่าเสร็จแล้วให้ปิดแล้วเปิด Router ใหม่ หลังเปิด Router จะเชื่อมต่ออินเทอร์เน็ตอัตโนมัติ

11. การตรวจสอบสถานะของ Router



- a. เวลาที่เชื่อมต่อ (Connection Time)
- b. รุ่นของ Aircard ที่เชื่อมต่อ (Card Info)

- c. สถานะการเชื่อมต่อ (Link Status)
- d. ความแรงของสัญญาณ (Signal Strength)
- e. เชื่อมต่อเครือข่ายอะไรอยู่ (Network Name)
- f. โหมดของ WiFi (Wireless Mode)
- g. ชื่อของ WiFi (SSID)
- h. รูปแบบของความปลอดภัย (Security)



WiFi Combo Broadband Gateway (R1.02a0(beta02))

English ▾

ADMINISTRATOR's MAIN MENU
Status
Wizard
Advanced
Logout

System Status
[HELP]

Item	Status	Sidenote
IP Address	10.14.31.142	
Subnet Mask	255.255.255.255	
Gateway	10.64.64.64	
Domain Name Server	61.91.211.78 , 119.46.78.98	
Connection Time	01:06:30	

Wireless Modem Information

Item	Status	Sidenote
Card Info	E160	Supported Cards List
Link Status	Connected.	
Signal Strength	96%	
Network Name	TRUE	

Wireless Status

Item	WLAN Status	Sidenote
Wireless mode	Enable	(B/G/N Mixed)
SSID	Total WiFi	
Channel	11	
Security	WPA2-PSK	(TKIP)

Statistics Information

Statistics of WAN	Inbound	Outbound
Octets	5954380	1149405
Unicast packets	5974	4414
Multicast packets	0	0

View Log...
Clients List...
NAT Status...
Refresh

Device Time: Fri, 15 Jan 2010 09:05:50 +0000

หมายเหตุ

- สอบถามข้อมูลเพิ่มเติม โทร 085-489-8335 ทุกวัน เวลา 10:00 – 19:00 น.

- ก่อนแจ้งปัญหาโปรดตรวจสอบว่าซิมของคุณใช้งานได้จริง จากผู้ให้บริการ(AIS 1175, DTAC 1678, TRUE 1331, TOT 1777)