TP-LINK®

300Mbps Wireless N ADSL2+ Modem Router

TD-W8961N

• Features:

- All-in-One: ADSL2+ modem, NAT router, 4-port switch and wireless N access point in one device provides an one-stop networking solution
- 300Mbps wireless speed makes it ideal for bandwidth consuming or interruption sensitive applications like online gaming, Internet call and even the HD video streaming
- Easy Setup Assistant with multi-language support provides quick & hassle free installation
- Guest Network Access provides secure Wi-Fi access for guests wireless coverage and reliability
- Wi-Fi On/Off Button allows users to simply turn their wireless radio on or off
- WPS Button allows users to easily set up a WPA encrypted secure connection
- SPI and NAT firewall protects end-user devices from potential attacks across the Internet
- 6000V Lightning Protection helps your device to avoid the damage of tough thunderstorms
- Supports the latest Internet Protocol IPv6 to future-proof your network
- Port VLAN binds specific LAN ports to PVCs for an enjoyable IPTV experience*



• Description:

TP-LINK's Wireless N ADSL2+ Modem Router TD-W8961N is an all-in-one device that combines the function of a high speed ADSL modem, a 4-port 10/100Mbps NAT router and a wireless N access point. It is designed to give you a one-stop solution to acquiring and sharing high speed Internet access over a wired/wireless network. Supporting the latest ADSL2+ standards, the TD-W8961N brings a much higher speed than a dial-up connection without tying up the phone line. Besides, Easy Setup Assistant with multi-language support provides quick & hassle free installation.


The TD-W8961N provides high-speed, unrivaled wireless performance for your network at 300Mbps. Now you can enjoy more kinds of bandwidth consuming applications even like HD video streaming wirelessly. Along with the features of Dual Firewalls (NAT and SPI), QoS engine and TR-069, making TD-W8961N the perfect choice for home or small office users.

 $[\]ensuremath{^{*}}$ IPTV application may require subscribing to IPTV services from an ISP.

Specifications:

	Product Description	300Mbps Wireless N ADSL2+ Modem Router
	LAN Ports	4 10/100Mbps RJ45 LAN ports
	WAN Port	1 RJ11 DSL port
	IEEE Standards	IEEE 802.3, 802.3u
	ADSL Standards	Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1(G.DMT),
	7.D3E Staridard3	ITU-T G.992.2(G.Lite), ITU-T G.994.1 (G.hs)
	ADSL2 Standards	ITU-T G.992.3 (G.dmt.bis), ITU-T G.992.4 (G.lite.bis)
	ADSL2+ Standards	ITU-T G.992.5
	Data Rates	Downstream: up to 24Mbps
		Upstream: up to 1Mbps
	ATM / PPP Protocols	ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs)
		ATM Adaptation Layer Type 5 (AAL5)
		Bridged and routed Ethernet encapsulation
	ATMI/ PPP PIOLOCOIS	VC and LLC based multiplexing
		PPP over Ethernet (RFC2516)
		PPP over ATM (RFC 2364)
		IPoA (RFC1577/2225)
		Dynamic Host Configuration Protocol (DHCP), DHCP relay
		Network Address Translation (NAT)
		Static Routing, RIP v1/v2
		VPN (PPTP, L2TP, IPSec) Pass-through
	Main Features	PVC/Ethernet Port Mapping
		VLAN, 802.1P
		DNS Relay, DDNS
		IGMP Multicast, IGMP snooping V1/2
		Virtual Server, DMZ, ACL (Access Control List)
	QoS	UPnP Oos Remarking based on IRP/Tos DSCP and 902.1p
	Q03	QoS Remarking based on IPP/ToS, DSCP and 802.1p Web Based Configuration (HTTP), Remote management,
	Management	Telnet management, Command Line Interface, SSL for TR-069, SNMP v1/2c,
	Wanagement	SNMP over EOC, Web Based Firmware Upgrade, CWMP (TR-069), Diagnostic Tools
		NAT Firewall
		SPI Firewall
	Security	MAC/IP/Packet/Application/URL Filtering
		Denial of Service (DoS), SYN Flooding, Ping of Death
	Wireless Standards	IEEE 802.11n, 802.11g, 802.11b
	Frequency Range	2.4-2.4835GHz
	Wireless Speed	11N: up to 300Mbps (dynamic)
	Mind and Consults.	Provides 64/128-bit WEP encryption security and wireless LAN ACL (Access Control List),
	Wireless Security	WPA-PSK/WPA2-PSK authentication and TKIP/AES encryption security
	Wireless Transmit Power (Max)	20dBm (Max.EIRP)
	Antenna Type	Omni directional, Fixed
	Dimensions (W \times D \times H)	$7.7 \times 5.1 \times 1.4 \text{ in. } (195 \times 130 \times 36 \text{mm})$
		Operating Temperature: 0°C~40°C (32°F~104°F),
	Environment	Storage Temperature: -40°C~70°C (-40°F~158°F),
	ZSimen	Operating Humidity: 10%~90% non-condensing ,
		Storage Humidity: 5%~90% non-condensing

• Diagram:

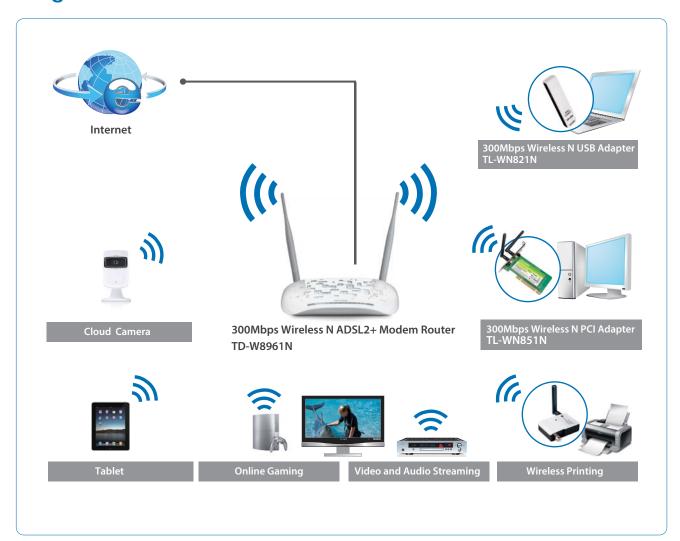

Package:

- 300Mbps Wireless N ADSL2+ Modem Router TD-W8961N
- One Power Adapter
- One External Splitter (Optional)
- Two RJ-11 Telephone Cables
- One RJ-45 Ethernet Cable
- Resource CD
- Quick Installation Guide

Related Products:

- 300Mbps Wireless N USB Adapter TL-WN821N
- 300Mbps Wireless N PCI Adapter TL-WN851N
- 5-Port 10/100M Desktop Switch TL-SF1005D